

### General characteristics

e-Charger: Trydan  
 Color: Black  
 Material: Polycarbonate MVR  
 Weight: 7 kg  
 Charging Cable length: 5 m / 10 m  
 Charging Cable type: Flat / Spring  
 Operating temperature: from -25° to 50°  
 Storage temperature: from -40° to 70°  
 Display: 2,6"  
 RGB lighting depending on state of charge

### Electrical characteristics

Conector type: Type 2 / Socket  
 Voltage: 230V / 400V  
 Maximum power output: 7,4kW - 11kW - 22kW\*1  
 Adjustable current: 6 - 32A (per phase)  
 Nominal frequency: 50Hz / 60Hz  
 Protection class: IP54 / IK10  
 Residual current detection: AC 30mA / DC 6mA\*1  
 MID meter\*2


\*1 Depending on the model

\*2 Optional

### Part number structure

Model			TRY
Intensity			32
Grid type	Single-phase		1
	Three-phase		3
Cable type	Flat	5m	L5
		10m	L10
	Spring		M
	Socket		S
Protections			P
Schuko			SC
Accessories:			
Leak detector			V2C-F
Remote			V2C-R
Cable support			V2C-SOP
Stand			V2C-PED
Single-phase MID meter			V2C-MID-1
Three-phase MID meter			V2C-MID-3

### Dimensions

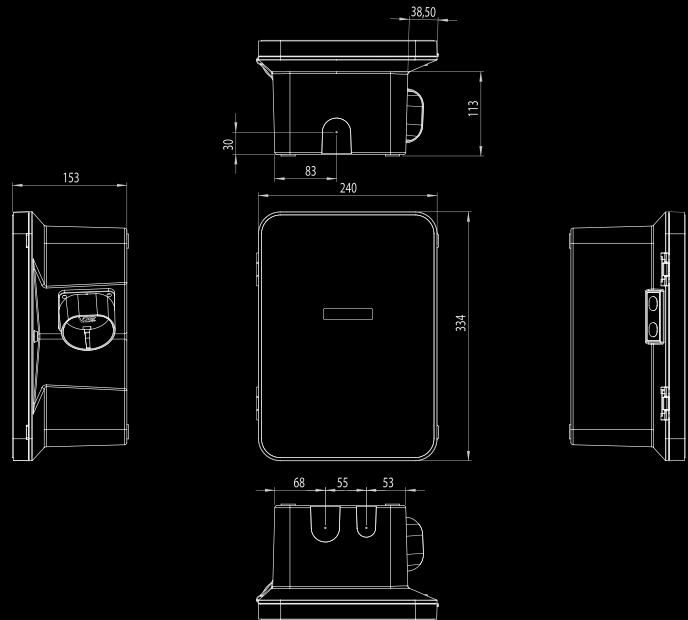

### Functional characteristics

User platform: APP & V2C Cloud portal  
 Connectivity: WiFi / Bluetooth  
 Communication: OCPP / Rest API Cloud  
 Configuration with smart devices: Alexa, Google Home  
 Dynamic Power Control (meter included)

### TRY32-1-L5-P-SC

